

Stockton 5

Product Code: 8575MCUC	Fuel Type: Natural Gas	Flue Types: Brick Chimney
Fuel Effect: Coals	Size / Type: Midi	Flexiliner
Efficiency: up to 73 %	Colour: Matt Black	N/A
Heat Input: 4.6 kw	Heat Output: 3.36 kw	Prefabricated

Product Specific Information

The Stockton 5 has a choice of top or rear flue exit. This product can be upgraded to remote control using either Standard or Programmable Thermostatic Timer Remote: see Accessory list below.

Please note: Due to the possible high temperature of the convected air above Gazco gas fires and stoves we recommend that Plasma TVs, valuable mirrors, photographs, paintings, porcelain, or other valuable items are not placed on the wall immediately above the appliance. Such artifacts may be damaged by long term exposure to fluctuating temperatures. The use of a mantelpiece may reduce the possibility of damage but Gazco does not accept any responsibility for damage in this instance.

Site Requirements


For specific information regarding full site requirements please refer to the installation instructions.

Recommended clearances between stove and other surfaces Top 9"(225mm), Sides 6"(150mm), Rear must be a minimum of 2"(50mm). This appliance must stand on a non combustible hearth that is at least 12mm thick and a minimum of 2"(50mm) all around the stove.

Servicing

Gazco recommends that this appliance is serviced every 12 months by your dealer or a registered CORGI engineer

Sizes

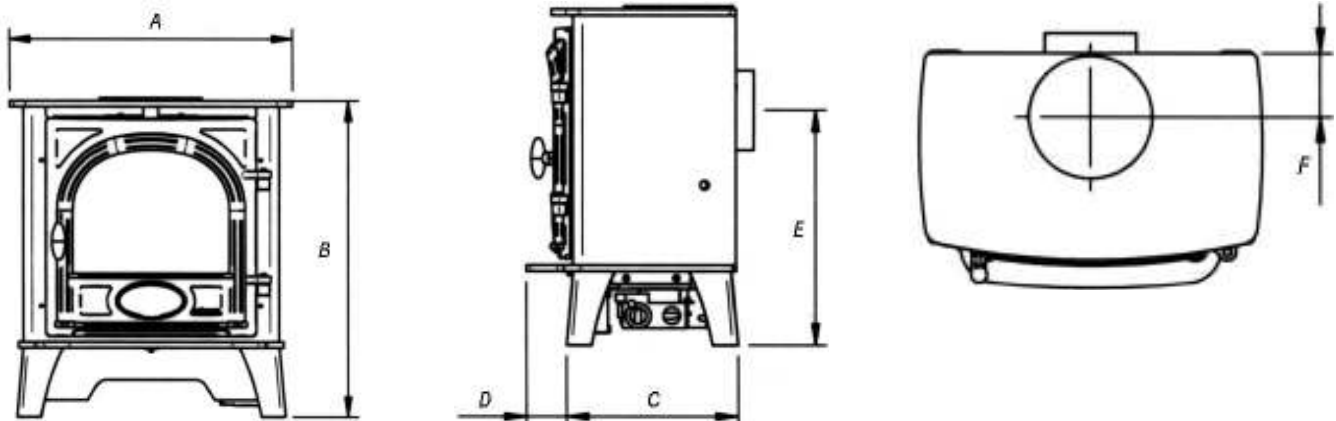

	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>	<u>F</u>	<u>G / C1</u>
mm	481	544	273	64	380	92	
ins	19	21.5	10.8	2.6	15	3.8	

Ventilation

There is no specific ventilation requirements for this product.

Accessories

<u>Code</u>	<u>Description</u>
4500	1' Straight Flue Pipe (Black)

4501	2' Straight Flue Pipe (Black)
4502	3' Straight Flue Pipe (Black)
4514	90° Long Flue 'Elbow' Adaptor (9" Projection)
8549	Flue Collar (Black)
8455	Standard Remote Control Kit
8456	Programmable Thermostatic Timer Remote Control Kit